



Architectural cross-section drawing of a foundation and wall assembly. Key components and dimensions include:

- Foundation (stopa F4):** Width 40 cm, height 40 cm, located at depth -0.80 m.
- Wall (wieniec Wf2 38x25):** Thickness 25 cm, height 52.6 m, located at depth -0.50 m.
- Floor Slab (ława L2 60x40):** Width 60 cm, height 40 cm, located at depth -1.96 m.
- Reinforcement:**
 - Foundation: 4 bars (Nr 13, 4 x Ø 12, L=5510).
 - Wall: 15 bars (Nr 15, 15 x Ø 12, L=10500) and 16 bars (Nr 16, 16 x Ø 12, L=10500).
 - Floor Slab: 6 bars (Nr 36, 6 x Ø 12, L=10500).
- Materials and Levels:**
 - Insulation (Styropian ekstrudowany 10 cm) is shown between the foundation and wall.
 - Ground level is marked as ±0.00.
 - Foundation level is marked as -0.80.
 - Wall level is marked as -0.50.
 - Floor slab level is marked as -1.96.



Architectural drawing of a structural column and foundation. The column is shown in cross-section with reinforcement bars (Nr 13, 14, 16, 17) and dimensions (52,6 m height, 37,9 m width). The foundation is labeled "ława L1 75x40" and "stopa F2". Elevation markers are shown at ± 0.00 , -0.50 , and -1.96 . Reinforcement details include B-20, B-15, and various bar counts and lengths.

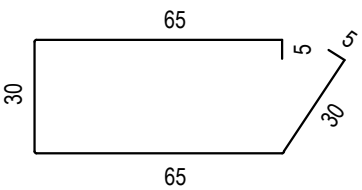

tytuł:	DETALE ARCH. przekrój ław 1-1,2-2	projektant:	skala:
obiekt i adres:	SALA GIMNASTYCZNA PRZY SZKOLE PODSTAWOWEJ Dobra, gm. Stryków,dz. nr 47/2, 48		1:20
inwestor:	Gmina Stryków, 95-010 Stryków, ul. Kościuszki 27		data: 10.2010
			nr rys.: 5k